

MODEL	RAD-1500A-5-D
MAX INLET AIR TEMP (F)	140°
MIN/MAX AMBIENT TEMP (F)	45°/120°
VOLTAGE	575V-3Ph-60Hz
REFRIGERANT	R404A
REFRIGERANT CHARGE (OZ)	288
LRA	79.2
RLA	15.2
МСА	14.6
MOP	40
COMPRESSOR	SCROLL
INLET/OUTLET PORT (NPT)	4 NPT
DESIGN PRESSURE LOW/HIGH	181/450 PSI
Compressor hp	12
weight (LBS)	1400
	•

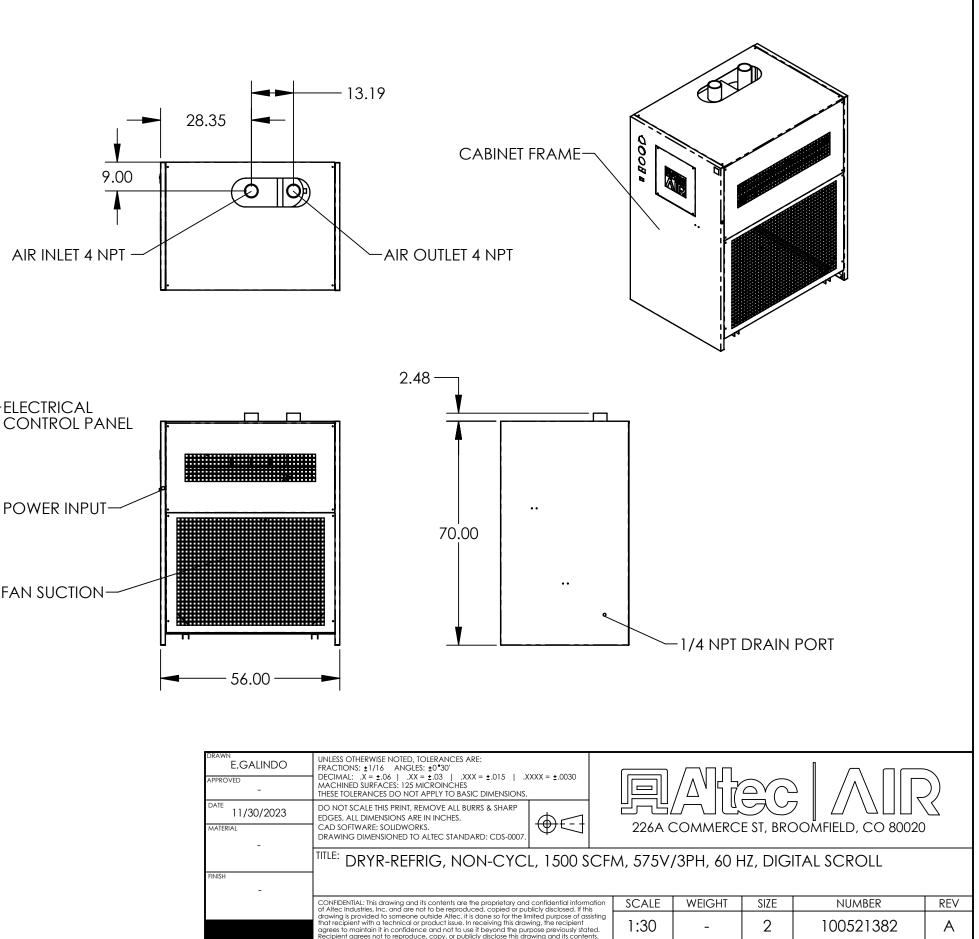

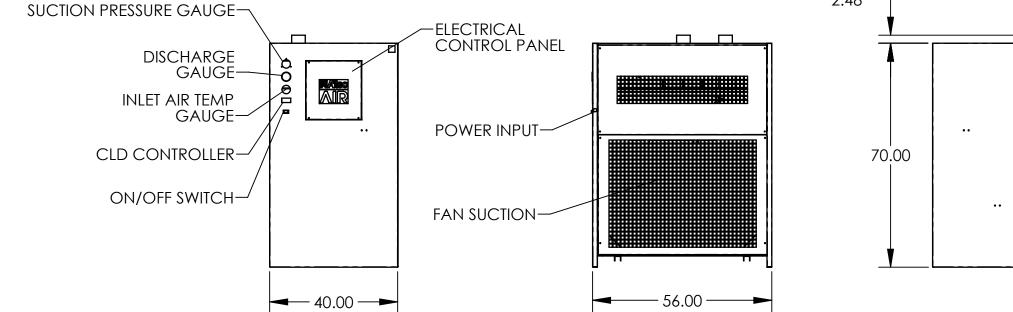

DRAWN E.GALINDO APPROVED -	UNLESS OTHERWISE NOTED, TOLERANCES ARE: FRACTIONS: ±1/16 ANGLES: ±0°30' DECIMAL: X = ±.06 XX = ±.03 XXX = ±.015 XXXX MACHINED SURFACES: 125 MICROINCHES THESE TOLERANCES DO NOT APPLY TO BASIC DIMENSIONS.	< = ±.0030	
DATE 11/30/2023	DO NOT SCALE THIS PRINT, REMOVE ALL BURRS & SHARP EDGES, ALL DIMENSIONS ARE IN INCHES.		
MATERIAL	CAD SOFTWARE: SOLIDWORKS. DRAWING DIMENSIONED TO ALTEC STANDARD: CDS-0007.	\mathbb{P}	
	TITLE: DRYR-REFRIG, NON-CYCL,	1500 SC	2
FINISH _			
	CONFIDENTIAL: This drawing and its contents are the proprietary and cor of Altec Industries, Inc. and are not to be reproduced, copied or publich drawing is provided to someone outside Altec, it solones so for the limited that recipient with a technical or product issue. In receiving this drawing agrees to maintain it in confidence and not to use it beyond the purpos Recipient agrees not to reproduce, copy, or publicly disclose this drawing	y disclosed. If this d purpose of assis , the recipient e previously states	tir d.

APPROVER: Kurz, Chanise; Galindo-Hernandez, Eduar.. - RELEASED BY: Galindo-Hernandez, Eduardo